

FIBERGLASS ENTRY DOOR SLAB · FLUSH GLAZED · HURRICANE IMPACT RATED (HVHZ)

4-Lite Grilles Between Glass 3/4 Lite

36" x 80" nominal (3/0 x 6/8) · Actual slab 35-3/4" x 79" x 1-3/4"

Scan to view this door
online: current options,
pricing and install guides



FIG. 1 ELEVATION AND EDGE VIEW

Exterior face shown. Drawn to scale; dimensions are actual, in inches.





FIG. 2 RAISED PANEL PROFILE

A decorative bead at the stile, a cove down to the panel edge, then a long, shallow slope rises to the raised field. .49" deep, 2.38" wide.



GLASS

Glass size	25" x 48"; daylight 23-7/8" x 46-7/8"
Unit	Flush glazed, no frame. Impact-rated insulated glass with a laminated pane
Design	4-lite grid (2 x 2) of white 5/8" or 7/8" grilles sealed between the panes. Privacy: none

DIMENSIONS

Nominal size	36" x 80" (3/0 x 6/8)
Actual slab	35-3/4" W x 79" H x 1-3/4" thick
Stiles	5-13/16" each side, to the lite field
Rails	Top 6" · bottom 9-7/8"
Lite opening	24-1/8" x 47-1/8"
Lower panel	24-1/8" x 12"
Prehung unit	About 37-1/2" x 81-3/4" (inswing or saddle sill), 37-1/2" x 80-3/4" (bumper sill)

CONSTRUCTION

Build	Impact-rated build, HVHZ approved
Stiles	Full-length 4" LVL lock and hinge stiles, composite PVC edge cap
Rails	Composite top and bottom rails; bottom rail kerfed for a drive-in sweep
Core	Foamed-in-place polyurethane, 2.2 lb/cu ft
Skins	Compression-molded fiberglass
Texture	Tan Rift Cut woodgrain or White Satin Smooth (paint grade)
Panel profile	Raised panel: bead, cove and sloped bevel, .49" deep (Fig. 2)
Edges	Square edge; reversible for left- or right-hand swing

PERFORMANCE

U-factor / SHGC	0.35 / 0.12 (NFRC 100 / 200)
ENERGY STAR 7.0	Not ENERGY STAR qualified
Impact rating	Large and small missile; HVHZ and wind-borne debris regions
Design pressure	HVHZ (outswing only): ±65 psf wood jambs, ±50 psf composite jambs. Elsewhere: ±50 psf, either swing
Fire rating	Not fire rated
Glass	25,000 slam cycles; IG certified to ASTM E2190

Thermal: NFRC calculated ratings, flush glazed impact Low-E glass with grilles, over 1,100 sq in glass class. Impact and DP per Florida approvals FL47392 (HVHZ, TAS 201/202/203) and FL47925. HVHZ installs require a Schlage F Series or Kwikset Signature lockset.

STANDARD HARDWARE PREPARATION

Ordered as Standard Prep. Blank (no prep) and custom prep to match an existing door are also available.

FIG. 3 LOCATIONS

From top of door, exterior view





FIG. 4 LOCK EDGE DETAIL

Cutaway at the lock stile



FIG. 5 HINGE EDGE DETAIL

Universal prep; top hinge shown, all three match

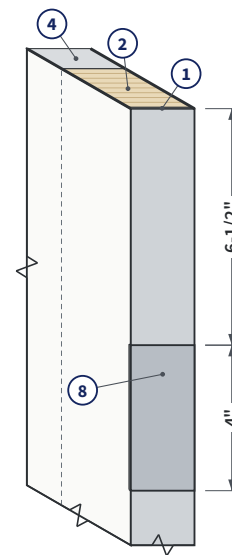

- ① Composite PVC edge cap on both stiles
- ② Full-length 4" LVL lock and hinge stiles; solid wood behind every bore, mortise and screw
- ③ Foamed-in-place polyurethane core, 2.2 lb/cu ft
- ④ Composite top and bottom rails
- ⑤ (2) 2-1/8" diameter face bores at 2-3/8" backset, 5-1/2" on center
- ⑥ (2) 1" edge bores for deadbolt and latch
- ⑦ Deadbolt and latch face prep: 1" x 2-1/4" x 5/32" deep, 1/4" radius corners
- ⑧ Universal hinge prep: 4" mortise, .100" deep, routed through the full edge with no screw holes, so the slab hangs either hand

HINGE PREP

Hinges	(3) 4" butt hinges, universal prep (no screw holes); 5/8" radius, 1/4" radius or square corners
Locations	6-1/2", 37-1/2", 68-1/2" from top of door to top of mortise

LOCK PREP

Bore centers	Deadbolt 40-3/8", latch 45-7/8" from top of door
Backset	2-3/8" standard; 2-3/4" on request

FINISHING

Rift Cut woodgrain: gel stain made for fiberglass, then a polyurethane topcoat with UV inhibitor (or paint over a bonding primer). **Satin Smooth:** bonding primer, then premium exterior acrylic latex paint. **Finish all six sides** promptly after delivery. Avoid very dark colors in direct sun.

TRIMMING

This door is not a trimmable model. If needed, it can be trimmed up to **1/2" off the bottom only**; seal the cut edge and, ideally, cover it with a U-style door sweep. **Do not trim the top or sides.** Trimming a door that is not sold as trimmable voids the warranty, and modified products cannot be returned. Cutting can also void the impact approval.

PEASE DOORS 20-YEAR LIMITED WARRANTY

Covers the door slab and its glass against defects in material and workmanship that make the product unfit for normal use. Valid for products purchased and installed in the USA with original proof of purchase. Requires proper storage, finishing and installation. Not valid when installed behind a storm door.

Year	1	2-3	4-6	7	8	9	10	11-20
Coverage	100%	90%	80%	70%	60%	50%	40%	30%

Share of replacement cost covered, by year after purchase.
Full terms and claims: [peasedoors.com/pages/warranty](https://www.peasedoors.com/pages/warranty)