Pease Doors
The Door Store

PRODUCT SPECIFICATION

SKU SE-2PR-1279-{RFG|SFG}-STD · Rev. 2026-10

FIBERGLASS SIDELITE PANEL · 2 PANEL REVERSIBLE · STANDARD BUILD

3/4 Lite Fiberglass Sidelite

12" x 80" nominal (1/0 x 6/8) · Actual sidelite 11-7/8" x 79" x 1-3/4"

Scan to view this sidelite online: current options, pricing and install guides

FIG. 1 ELEVATION AND EDGE VIEW

Exterior face. To scale; actual inches.


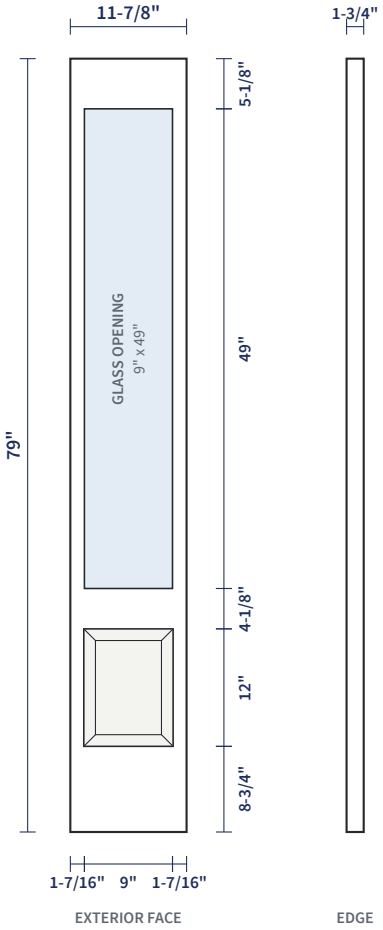


FIG. 2 RAISED PANEL PROFILE

A decorative bead at the stile, a cove down to the panel edge, then a long, shallow slope rises to the raised field. .49" deep, 2.38" wide.

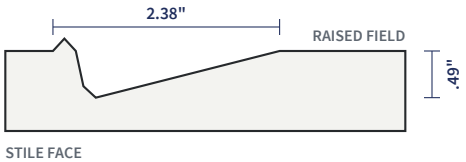

GLASS

Takes	A door glass kit for a 9" x 49" opening: glass 8" x 48", frame 10" x 50" outside
Choices	Clear, Low-E, privacy, decorative or blinds glass, installed in our shop, or the opening alone

DIMENSIONS

Nominal size	12" x 80" (1/0 x 6/8)
Actual sidelite	11-7/8" W x 79" H x 1-3/4" thick
Glass opening	9" x 49", cut in our shop: 5-1/8" from the top, 1-7/16" from each edge
Raised panel	9-1/8" x 12", 4-1/8" below the opening, 8-3/4" from the bottom
Reversible	One 2 panel slab, cut either way up: the 3/4 lite keeps the short panel at the bottom, the half lite the tall one
In a unit	Pairs with 81-3/4" leg jambs (inswing or saddle sill) or 80-3/4" (bumper sill); same height as the door

CONSTRUCTION

Build	Standard build
Stiles	LVL stiles with composite PVC edge caps
Rails	Composite top and bottom rails
Core	Foamed-in-place polyurethane, 2.2 lb/cu ft
Skins	Compression-molded fiberglass
Texture	White Satin Smooth (paint grade) or Tan Rift Cut woodgrain
Panel profile	Raised panel: bead, cove and sloped bevel, .49" deep (Fig. 2)
Edges	Square edge; fixed panel, no hinge or lock prep

PERFORMANCE

U-factor / SHGC	Set by the glass kit installed; see its specification
Design pressure	±50 psf in a door-and-sidelite unit, inswing or outswing
Impact rating	Not impact rated
Fire rating	Not fire rated

Design pressure per Florida Product Approval FL47925 (non-impact).

12" x 80" is the nominal trade size; all dimensions shown are actual. Specifications are subject to change without notice. Verify local code requirements before installation.

INSTALLATION

Sidelite panels are fixed and have no hinge or lock prep. Install alongside a door slab of the same height, assembled into one frame with 81-3/4" leg jambs (inswing or saddle sill). Step-by-step guides are on the product page (scan the QR code).

GLASS OPENING

We cut the 9" x 49" opening in our shop, centered and 5-1/8" from the top, following the ODL door glass standard. Glass kits are sized by the outside of their plastic frame, 1" larger than the opening each way. The cut panel is made to order and is not returnable.

FINISHING

Satin Smooth: bonding primer, then premium exterior acrylic latex paint. **Rift Cut woodgrain:** gel stain made for fiberglass, then a polyurethane topcoat with UV inhibitor (or paint over a bonding primer). **Finish all six sides** promptly after delivery. Avoid very dark colors in direct sun.

TRIMMING

This sidelite is not a trimmable model. If needed, it can be trimmed up to **1/2" off the bottom only;** seal the cut edge. **Do not trim the top or sides.** Trimming a product that is not sold as trimmable voids the warranty, and modified products cannot be returned.

PEASE DOORS 20-YEAR LIMITED WARRANTY

Covers the sidelite panel and its glass against defects in material and workmanship that make the product unfit for normal use. Valid for products purchased and installed in the USA with original proof of purchase. Requires proper storage, finishing and installation. Not valid when installed behind a storm door.

Year	1	2-3	4-6	7	8	9	10	11-20
Coverage	100%	90%	80%	70%	60%	50%	40%	30%

Share of replacement cost covered, by year after purchase. Full terms and claims: peasedoors.com/pages/warranty

12" x 80" is the nominal trade size; all dimensions shown are actual. Specifications are subject to change without notice. Verify local code requirements before installation.